

SPLIT CORE CT



MODEL-VIPS SC01
 Primary : 100A to 400
 Secondary : 5A / 1A
 Bus Bar Dimension : 21 (H) x 31 (W)



MODEL-VIPS SC02
 Primary : 250A to 1000
 Secondary : 5A / 1A
 Bus Bar
 Dimension : 50 (H) x 80 (W)



MODEL-VIPS SC03
 Primary : 500A to 1500
 Secondary : 5A / 1A
 Bus Bar
 Dimension : 80 (H) x 120 (W)



MODEL-VIPS SC04
 Primary : 1000A to 4000
 Secondary : 5A / 1A
 Bus Bar
 Dimension : 80 (H) x 160 (W)

CUSTOMISED PANEL - For easy installation



VIPS-CP-87



VIPS-CP-86



VIPS-CP-88



VIPS-CP-89

ALARM ANNUNCIATOR



VIPS-109-4W
 4 CHANNEL ALARM ANNUNCIATOR



VIPS-109-6W
 6 CHANNEL ALARM ANNUNCIATOR



VIPS-109-8W
 8 CHANNEL ALARM ANNUNCIATOR




Features

VIPS-TH NO / NC THERMOSTAT	VIPS-DTH DUAL THERMOSTAT	VIPS-HG HYGROSTAT
Large Setting Range, Small Size, Simple to Mount, Thermostatic Bimetal Sensor, Sharp Action Contact, Low Contact Resistance		
Available in NO / NC types	Dual NO & NC contact available	Available in 1 C/O (NO, C, NC contact)
Range : 0° C to 60° C		Range : 40 to 90% RH
Contact : 10A / 250 VAC, 15A / 120 VAC	Contact : 10A / 250 VAC, 15A / 120 VAC	Contact : 10A / 250 VAC, 15A / 120 VAC
Dimension : 60 x 33 x 43 (L x W x D mm)	Dimension : 66 x 50 x 45 (L x W x D mm)	Dimension : 66 x 50 x 38 (L x W x D mm)

VIPS SPR-Watts

SPACE PANEL HEATER

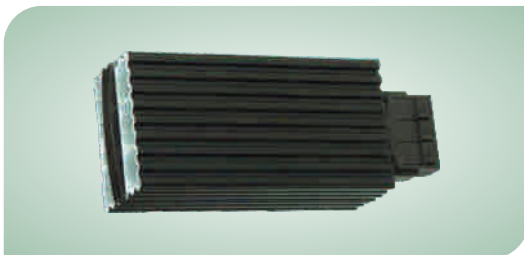

Features

Pressure clamp connectors	Extruded Aluminium Profile, Anodised
Dynamic Heating up	PTC Resistor, Self Regulating & Temperature limiting
Temperature limiting	Clip Fixing
Wide Voltage Range	Quick Installation
Energy Saving	Available in 25, 30, 45, 60, & 75 watts